

# 3M01

## Full Extension Ball Bearing Slide -Standard Type



### Specifications

- **Length:** 250mm to 1000mm (10" to 40")
- **Profile:** 45.6mm x 12.7mm
- **Travel:** Full Extension
- **Side Space:** 12.7mm (+0.5mm-0mm)
- **Height:** 45.6mm (1.80")
- **Max. Loading:** 45 kg (100 lb)
- **Mount:** Side Mount
- **Disconnect:** Lever Disconnect
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel


### Packing

- Unit Packed in 15 pairs/carton
- Bulk Packed in 40 pcs/carton for cabinet member 100 pcs/carton for drawer member

### Applications

- Kitchen Furniture, Home Cabinets, Box Drawers, Desk and Storage Drawers and File Drawers

### Dimension Specifications

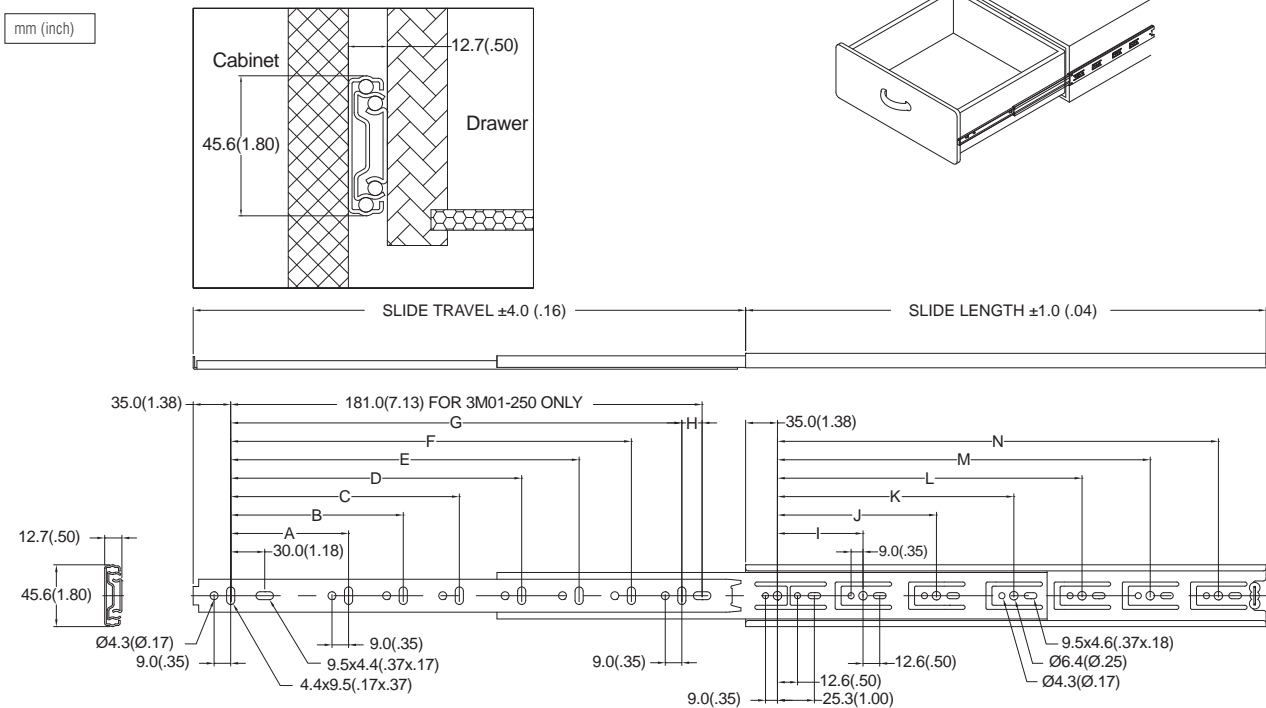

Note: Holes other than those shown may be in the slide member at King Slide's option and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Holes Position mm (inch)													
				A	B	C	D	E	F	G	H	I	J	K	L	M	N
3M01-250	250.0 (9.84)	256.7 (10.11)	22.7 (50.0)	96.0 (3.78)	—	—	—	—	—	—	—	—	—	—	—	—	160.0 (6.30)
3M01-300	300.0 (11.81)	306.7 (12.07)	27.3 (60.0)	128.0 (5.04)	—	—	—	—	—	220.0 (8.66)	11.0 (0.43)	128.0 (5.04)	—	—	—	—	224.0 (8.82)
3M01-350	350.0 (13.78)	356.7 (14.04)	34.1 (75.0)	128.0 (5.04)	—	—	—	—	—	270.0 (10.63)	11.0 (0.43)	128.0 (5.04)	—	—	—	—	224.0 (8.82)
3M01-400	400.0 (15.75)	406.7 (16.01)	45.4 (100.0)	128.0 (5.04)	—	—	—	—	—	320.0 (12.60)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	—	—	—	320.0 (12.60)
3M01-450	450.0 (17.72)	456.7 (17.98)	45.4 (100.0)	128.0 (5.04)	320.0 (12.60)	—	—	—	—	370.0 (14.57)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	—	—	—	352.0 (13.86)
3M01-500	500.0 (19.69)	506.7 (19.95)	45.4 (100.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	—	—	—	416.0 (16.38)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	—	—	—	416.0 (16.38)
3M01-550	550.0 (21.65)	556.7 (21.92)	45.4 (100.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	—	—	470.0 (18.53)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	448.0 (17.64)
3M01-600	600.0 (23.62)	606.7 (23.89)	38.6 (85.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	—	—	—	520.0 (20.47)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	480.0 (18.90)
3M01-650	650.0 (25.59)	656.7 (25.85)	31.8 (70.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	—	—	570.0 (22.44)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	544.0 (21.42)
3M01-700	700.0 (27.56)	706.7 (27.82)	27.2 (60.0)	128.0 (5.04)	224.0 (8.82)	416.0 (16.38)	544.0 (21.42)	—	—	620.0 (24.41)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	544.0 (21.42)
3M01-750	750.0 (29.53)	756.7 (29.79)	21.8 (48.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	544.0 (21.42)	—	—	670.0 (26.38)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	—	—	544.0 (21.42)
3M01-800	800.0 (31.50)	806.7 (31.76)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	320.0 (12.60)	544.0 (21.42)	—	—	720.0 (28.35)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	672.0 (26.46)
3M01-850	850.0 (33.46)	856.7 (33.73)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	—	770.0 (30.31)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	736.0 (28.98)
3M01-900	900.0 (35.43)	906.7 (35.70)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	—	820.0 (32.28)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	736.0 (28.98)
3M01-950	950.0 (37.40)	956.7 (37.67)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	—	870.0 (34.25)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	—	736.0 (28.98)
3M01-1000	1000.0 (39.37)	1006.7 (39.63)	17.7 (39.0)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	576.0 (22.68)	704.0 (27.72)	832.0 (32.76)	920.0 (36.24)	11.0 (0.43)	128.0 (5.04)	224.0 (8.82)	352.0 (13.86)	544.0 (21.42)	736.0 (28.98)	864.0 (34.02)